




# LITEON

## Lite On Out 19V/6.3A/120W model PA-1121-04

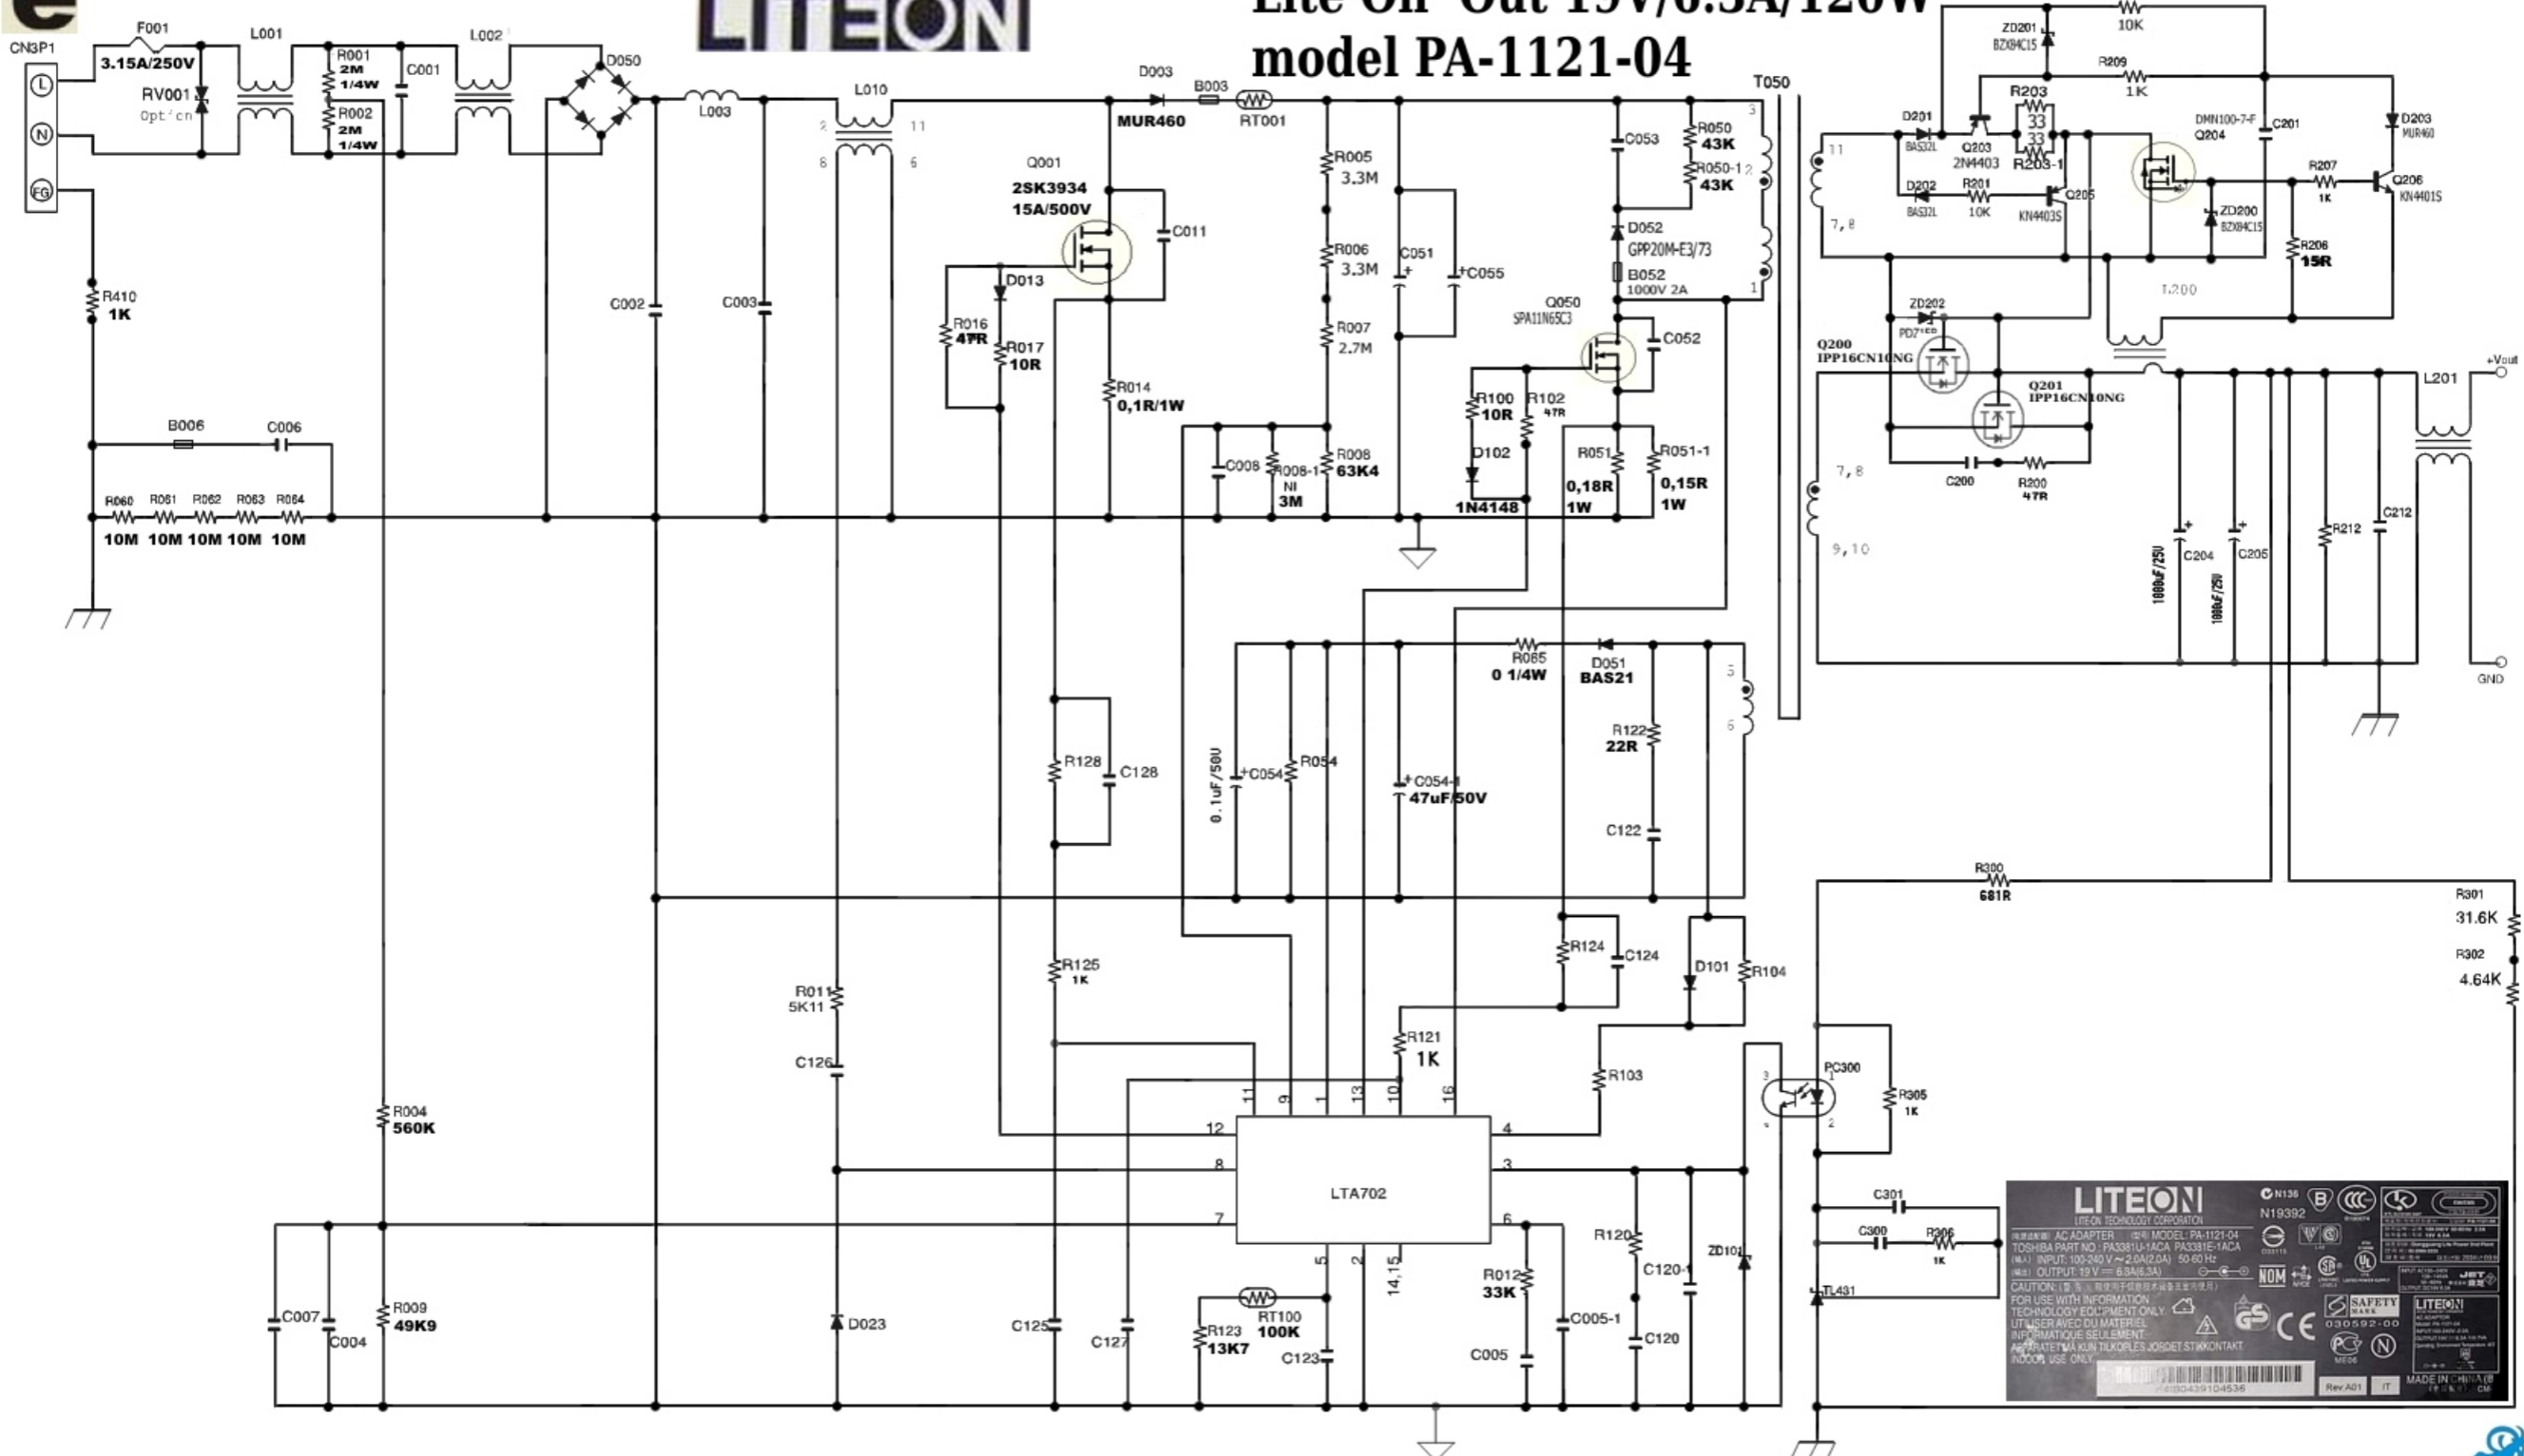

| DESCRIPTION                      | LOCATION                | DESCRIPTION                      | LOCATION            | DESCRIPTION                      | LOCATION             | DESCRIPTION                      | LOCATION            |
|----------------------------------|-------------------------|----------------------------------|---------------------|----------------------------------|----------------------|----------------------------------|---------------------|
| R.MF 10K 1/10W F 0603            | R208                    | C.ELE 1000UF 25V M 12.5*20 HD    |                     | R.MF 10K 1/10W F 0603            | R208                 | C.ELE 1000UF 25V M 12.5*20 HD    |                     |
| R.CF 33 1/4W J 1206              | R203,R203-1             | C.ELE 1000UF 25V M 12.5*20 ZL    |                     | R.CF 33 1/4W J 1206              | R203,R203-1          | C.ELE 1000UF 25V M 12.5*20 ZL    |                     |
| R.MF 4.64K 1/10W F 0603          | R302                    | C.MON 3300PF 500V K X7R 1206     | C053                | R.MF 4.64K 1/10W F 0603          | R302                 | C.MON 3300PF 500V K X7R 1206     | C053                |
| R.MF 31.60K 1/10W F 0603         | R301                    | C.MON 3300PF 630V K X7R 1206     |                     | R.MF 31.60K 1/10W F 0603         | R301                 | C.MON 3300PF 630V K X7R 1206     |                     |
| R.CF 10M 1/4W J 1206             | R060,R061,R062,R063,R06 | C.MON 1UF 16V K X7R 0603         | C007                | R.CF 10M 1/4W J 1206             | R060,R061,R062,R063, | C.MON 1UF 16V K X7R 0603         | C007                |
| R.MO 0.18 1W(S) J                | R051                    | C.MON 470PF 100V K NPO 0805      | C200                | R.MO 0.18 1W(S) J                | R051                 | C.MON 470PF 100V K NPO 0805      | C200                |
| R.MF 681.0 1/10W F 0603          | R300                    | C.MON 2.2UF 16V K X5R 0603       | C004                | R.MF 681.0 1/10W F 0603          | R300                 | C.MON 2.2UF 16V K X5R 0603       | C004                |
| R.CF 10K 1/8W J 0805             | R201                    | C.MON 0.047UF 25V K X7R 0603     | C128                | R.CF 10K 1/8W J 0805             | R201                 | C.MON 0.047UF 25V K X7R 0603     | C128                |
| R.CF 15 1/10W J 0603             | R206                    | C.MON 0.15UF 25V K X7R 0603      | C005-1              | R.CF 15 1/10W J 0603             | R206                 | C.MON 0.15UF 25V K X7R 0603      | C005-1              |
| R.MF 1.00K 1/4W F 1206           | R410                    | C.MON 0.47UF 16V K X7R 0603      | C120                | R.MF 1.00K 1/4W F 1206           | R410                 | C.MON 0.47UF 16V K X7R 0603      | C120                |
| R.TH TTC 100K K 5D 1.5MA         | RT100                   | C.MON 0.01UF 50V K X7R 0603      | C120-1,C123,C008    | R.TH TTC 100K K 5D 1.5MA         | RT100                | C.MON 0.01UF 50V K X7R 0603      | C120-1,C123,C008    |
| R.MF 3M 1/10W F 0603             | R008-1                  | C.MON 220PF 200V J NPO 0805      | C122                | R.MF 3M 1/10W F 0603             | R008-1               | C.MON 220PF 200V J NPO 0805      | C122                |
| JUMPER 0.8D BT TAPING            | JP5(10MM)               | C.MON 0.1UF 50V K X7R 0805       | C054                | JUMPER 0.8D BT TAPING            | JP5(10MM)            | C.MON 0.1UF 50V K X7R 0805       | C054                |
| JUMPER 0.8D BT TAPING            | JP3(7.5MM)              | C.MON 0.47UF 16V K X7R 0603      | C005                | JUMPER 0.8D BT TAPING            | JP3(7.5MM)           | C.MON 0.47UF 16V K X7R 0603      | C005                |
| R.CF 0 1/8W J 0805               | JP7                     | C.MON 0.1UF 25V K X7R 0603       | C124,C201,C300,C301 | R.CF 0 1/8W J 0805               | JP7                  | C.MON 0.1UF 25V K X7R 0603       | C124,C201,C300,C301 |
| R.CF 0 1/4W J 1206               | R065                    | C.MON 220PF 500V K NPO 1206      | C011                | R.CF 0 1/4W J 1206               | R065                 | C.MON 220PF 500V K NPO 1206      | C011                |
| JUMPER 0.5D BT RUCH              | JP1(10MM)               | C.MON 220PF 630V K NPO 1206      | C052                | JUMPER 0.5D BT RUCH              | JP1(10MM)            | C.MON 220PF 630V K NPO 1206      | C052                |
| R.CF 0 1/10W J 0603              | JP4,JP6                 | C.DIS 4700PF 1KV K X7R 7.5 HI-K  | C055                | R.CF 0 1/10W J 0603              | JP4,JP6              | C.DIS 4700PF 1KV K X7R 7.5 HI-K  | C055                |
| JUMPER 0.5D BT RUCH              | J201(6MM*1)             | C.DIS 4700PF 1KV K X7R H7.5VISHY |                     | JUMPER 0.5D BT RUCH              | J201(6MM*1)          | C.DIS 4700PF 1KV K X7R H7.5VISHY |                     |
| JUMPER 0.5D BT RUCH              | JP2(12.5MM*1)           | C.MON 560PF 50V J NPO 0805       | C126                | JUMPER 0.5D BT RUCH              | JP2(12.5MM*1)        | C.MON 560PF 50V J NPO 0805       | C126                |
| C.MEF 1UF 450V K 15 MTF          | C002,C003               | C.MON 0.01UF 50V K X7R 1206      | C212                | C.MEF 1UF 450V K 15 MTF          | C002,C003            | C.MON 0.01UF 50V K X7R 1206      | C212                |
| C.MEF 1UF 450V J 15 MMX          |                         | C.MON 100PF 50V K X7R 0603       | C125                | C.MEF 1UF 450V J 15 MMX          |                      | C.MON 100PF 50V K X7R 0603       | C125                |
| C.DIS 680PF 400V K B 10 KX-S     | C006                    | C.MON 330PF 50V G NPO 0603       | C127                | C.DIS 680PF 400V K B 10 KX-S     | C006                 | C.MON 330PF 50V G NPO 0603       | C127                |
| C.DIS 680PF 400V M E 10 CD       |                         | CHOKE A1121-04TI PQ2620 PL9      | L010                | C.DIS 680PF 400V M E 10 CD       |                      | CHOKE A1121-04TI PQ2620 PL9      | L010                |
| C.MEX 0.22UF 275V K 15 MPX       | C001                    | XFMR A1121-04TI PQ3220 PC44      | T050                | C.MEX 0.22UF 275V K 15 MPX       | C001                 | XFMR A1121-04TI PQ3220 PC44      | T050                |
| C.MEX 0.22UF 275V K 15 MKP       |                         | CHOKE TR16*12*8 SM100            | L002                | C.MEX 0.22UF 275V K 15 MKP       |                      | CHOKE TR16*12*8 SM100            | L002                |
| C.MEX 0.22UF 275V K 15 MPX-D25   |                         | CHOKE TR12*6*4 H5L               | L001                | C.MEX 0.22UF 275V K 15 MPX-D25   |                      | CHOKE TR12*6*4 H5L               | L001                |
| C.ELE 120UF 420V M 18*30 KMG     | C051                    | CHOKE TR9*5*3 A07 150T 3.0       | L200                | C.ELE 120UF 420V M 18*30 KMG     | C051                 | CHOKE TR9*5*3 A07 150T 3.0       | L200                |
| C.ELE 120UF 420V M 18*30 KXW(3L) |                         | CHOKE T60-26 215UH               | L003                | C.ELE 120UF 420V M 18*30 KXW(3L) |                      | CHOKE T60-26 215UH               | L003                |
| C.ELE 47UF 50V 6.3*11 YXG 5T     | C054-1                  | BEAD CORE RH3.5*5.0*1.8 H381     | B006(C006-)         | C.ELE 47UF 50V 6.3*11 YXG 5T     | C054-1               | BEAD CORE RH3.5*5.0*1.8 H381     | B006(C006-)         |
| C.ELE 47UF 50V M 6.3*11 KY 5T    |                         | CHOKE RI9.5*5*5 800UI            | L201                | C.ELE 47UF 50V M 6.3*11 KY 5T    |                      | CHOKE RI9.5*5*5 800UI            | L201                |
| C.ELE 47UF 50V M 6.3*11 PW5T     |                         | BEAD CORE RH3.5*9*1.5 A6         | B003(FOR D003-)     | C.ELE 47UF 50V M 6.3*11 PW5T     |                      | BEAD CORE RH3.5*9*1.5 A6         | B003(FOR D003-)     |
| C.ELE 1000UF 25V M 12.5*20 KZE   | C204,C205               | BEAD CORE RH3.5*6.0*1.2 H28      | B052(D052-)         | C.ELE 1000UF 25V M 12.5*20 KZE   | C204,C205            | BEAD CORE RH3.5*6.0*1.2 H28      | B052(D052-)         |